


STEELGRIP™




Combining toughness with ease of installation, Steelgrip makes a strong, smooth splice on all types of transmission and light conveyor belts.

Time-tested and proven dependable, the strength of the lacing is enhanced due to the common bar, which yields a continuous lacing strip for the width of the belting. Thus, the tension is distributed across the entire belt width. Made of a special steel that allows the points to pierce the belt carcass, yet the teeth are designed to enter the belt fabric without cutting the longitudinal strength members of the belting.

Application requires a hammer and gauge pin — no further tools are needed — to assure long life and maximum reliability in lightweight belts.

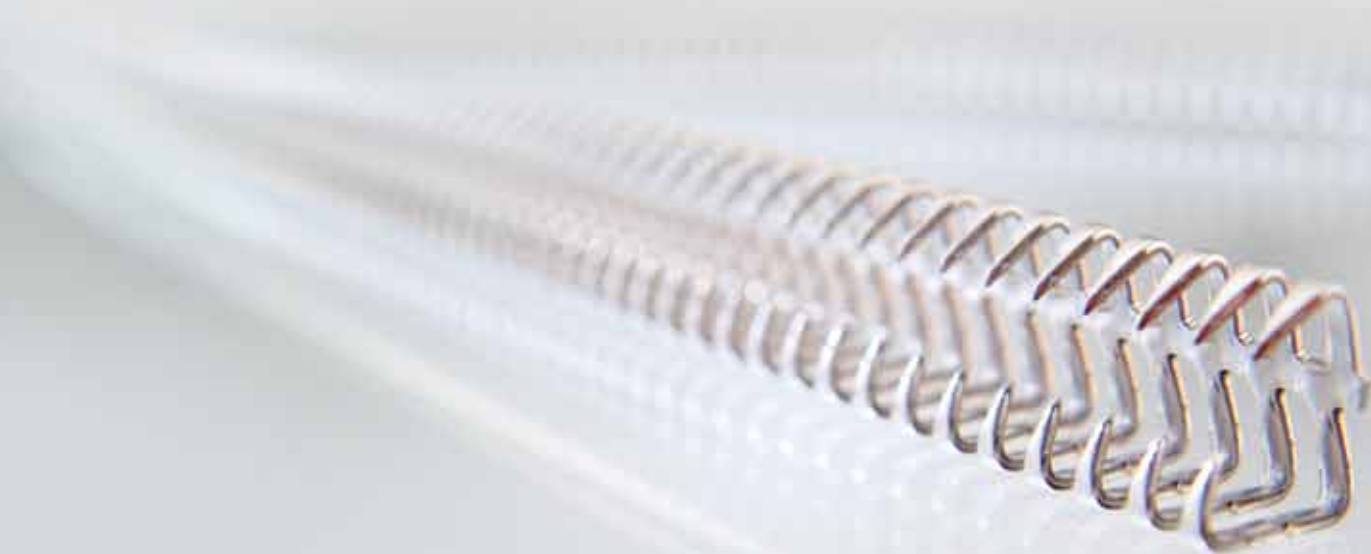

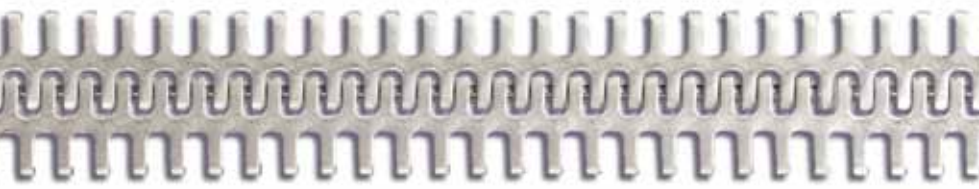

Flat Power Transmission Lacing

Each standard box and economy pack includes lacing, gauge pin, corrugated hinge pin, and instructions. See page 40 for pricing of economy cartons.

STEELGRIP STEEL POWER TRANSMISSION LACING

ITEM	NO. OF SETS	LENGTH	PRICE
00	6	6"	\$19.84
1A	6	6"	17.42
7	6	6"	16.70
15	4	12"	24.26
20	4	12"	28.44
27K	4	12"	27.38
27L	8	12"	54.68
35N	4	12"	35.08
45U	4	12"	34.06

STEELGRIP STAINLESS STEEL POWER TRANSMISSION LACING

ITEM	NO. OF SETS	LENGTH	PRICE
00S	6	6"	\$40.86
1AS	6	6"	40.42
7S	A6	6"	45.88
15S	4	12"	66.74
20S	4	12"	90.56
27KS	4	12"	105.62
35NS	4	12"	165.06
45US	4	12"	189.48



INSTALLATION TOOLS ARE SHOWN ON PAGE 40.

SELECTING SIZE, WEIGHT & METAL

Steelgrip lacing comes in eight sizes for belts from 1/8" to 3/8" thickness. The lacing is cross-scored so it can easily be broken by hand to fit any belt width exactly. Each box includes lacing, a gauge pin, hinge pins, and installation instructions.

SIZE SELECTION

BELT THICKNESS	MIN. PULLEY	SIZE
1/16"	1"	00
1/16" - 3/32"	1 1/2"	1A
3/32" - 9/64"	2"	7
1/8" - 5/32"	2 1/2"	15
5/32" - 3/16"	3"	20
1/4" - 9/32"	5"	27
9/32" - 5/16"	7"	35
5/16" - 3/8"	9"	45

SHIPPING WEIGHT

SIZE	WT. LBS.
00	0.3
1A	0.6
7	0.8
15	1.0
20	1.1
27	1.8
35	2.7
45	3.2

GALVANIZED Standard for sizes 00, 1, and 7. Good for abrasion utilizing a low-carbon steel. Galvanizing provides some resistance to elements. Magnetic and poor chemical resistance.

CARBON STEEL Standard for sizes 15 through 45. Good for abrasion, utilizing a low carbon steel which has good forming characteristics that allow easy installation. Magnetic and poor chemical resistance.

STAINLESS STEEL A nickel chrome stainless steel that offers excellent resistance to fatty acids and wash-down chemicals, also good for mechanical abrasion. Excellent for use where food and sanitation requirements are high. Basically non-magnetic.

Steelgrip Conveyor Belt Lacing

With long lengths for flat conveyor belt applications, Steelgrip lacing is available in eight styles and an almost endless variety of lengths to suit the specific application. The advantage of long lengths is to assure uniform pull across wide belts, distributing tension of the belt evenly. Steelgrip long-length lacing is available from stock in most popular long-lengths up to 60". Special lengths, including continuous strips for extremely wide belts, are also available.

Steelgrip long-length lacing is specially mounted, and shipped in cartons designed specifically for the purpose in order to prevent bending or end damage.

Steelgrip size 25 has been combined with size 27. For application questions, contact our tech support at (800) 323-7093.

CONVEYOR BELT LACING — STEEL

4 COMPLETE SETS OF LACING WITH GAUGE PIN AND 4 HINGE PINS

	00	1A	7	15	20	27	35	45
12"	\$26.98	\$26.42	\$25.34	\$26.48	\$30.98	\$29.84	\$38.30	\$37.18
14"	31.48	30.88	29.54	30.88	36.10	34.80	44.60	43.32
16"	36.00	35.24	33.78	35.24	41.28	39.78	51.02	49.52
18"	40.46	39.66	37.92	39.66	46.42	44.70	57.38	55.72
20"	45.00	44.06	42.22	44.06	51.62	49.70	63.74	61.88
24"	53.98	52.84	50.60	52.84	61.86	59.68	76.46	74.28
30"	67.46	66.08	63.30	66.08	77.34	74.58	95.62	92.78
36"	80.90	79.24	75.98	79.24	92.78	89.48	114.68	111.38
42"	94.38	92.46	88.54	92.46	108.28	104.38	133.80	129.96
48"	107.88	105.68	101.20	105.70	123.76	119.28	152.92	152.06
60"	134.86	132.06	126.52	132.06	154.64	149.10	191.14	186.32

	00S	1AS	7S	15S	20S	27S	35S	45S
12"	\$50.08	\$52.36	\$59.44	\$66.74	\$90.56	\$105.62	\$165.06	\$189.48
14"	58.44	61.12	69.36	77.86	105.62	123.40	192.54	—
16"	66.78	69.82	79.23	88.96	120.72	140.80	220.00	—
18"	75.08	78.58	89.14	100.10	135.76	158.46	247.62	284.16
20"	83.40	87.24	100.12	111.18	150.86	176.06	274.98	—
24"	100.12	104.68	118.82	133.36	181.04	211.20	330.00	378.82
30"	125.14	130.92	148.62	166.72	226.26	264.00	412.50	473.52
36"	150.18	157.06	178.22	199.90	271.50	316.90	495.02	568.28
42"	175.22	183.22	207.88	233.34	316.72	369.66	593.52	663.08
48"	200.22	209.40	237.64	266.72	362.02	422.40	659.94	757.72
60"	250.22	261.68	297.02	333.38	452.46	528.02	824.96	938.44

INSTALLATION INSTRUCTIONS

Get installation instructions for these and other Conveyor Accessories products online at:

www.conveyoraccessories.com/instructions

Extra Supplies

Economy Cartons

A convenient way to purchase our quality product for counter display. These cartons come packed with 10 individual 12" sets in their own poly-wrapped enclosure. Each contains a gauge pin and hinge pin. Sold in cartons only.

SIZE	STEEL
15E	\$76.40
20E	89.48
27E	86.28
35E	110.54

Extra Hinge pins

SIZE	CORRUGATED STEEL	STAINLESS
00	\$0.60	\$1.08
1	0.60	1.08
7	0.60	1.08
15	0.76	2.12
20	0.76	2.68
27	0.86	4.06
35	0.90	4.92
45	1.08	5.94

Price per inch. Ten pins/pack.
Multiply per inch by length of pin to determine price per package.

SPECIFICATIONS

ECONOMY CARTONS

BELT THICKNESS	WEIGHT LBS.	SIZE
1/8"–5/32"	2.3	15E
5/32"–3/16"	3.0	20E
7/32"–9/32"	4.5	27E
9/32"–5/16"	6.8	35E



Steelgrip Belt Holder

To speed the installation of Steelgrip flexible belt lacing, each tool comes complete with changeable end blocks and three gauge pins to install # 1–7, # 15–20, and # 27. Bolt-down holders secure the belt in position for correct installation. The gauge pin assures proper alignment of the fastener to the belt. Tools can be purchased in 12, 24, 36, and 48" widths.

NUMBER	PRICE
SGBH-12	\$289.16
SGBH-24	481.32
SGBH-36	723.70
SGBH-48	964.36